

PATENT ABSTRACTS OF JAPAN

(11)Publication number : 2000-087831

(43)Date of publication of application : 28.03.2000

(51)Int.Cl.

F02N 11/08

(21)Application number : 10-254948

(71)Applicant : MITSUBISHI ELECTRIC CORP

(22)Date of filing : 09.09.1998


(72)Inventor : HISAMOTO MOTOI

(54) STARTER PROTECTOR DEVICE

(57)Abstract:

PROBLEM TO BE SOLVED: To provide a compact starter protector device easily mountable on a starter, by making the most of a vacant space not utilized in the past.

SOLUTION: A starter protector device preventing excessive heat generation of a starter and restarting during operation or the like of an engine comprises an auxiliary switch 120 performing opening/closing operation of a main switch of the starter, a mounting bracket 125 having main unit part 125a extended in a peripheral direction along an outer peripheral surface of a housing 123 of the auxiliary switch 120 and to be secured thereto, and a pair of leg parts 125b integrally extended in almost parallel from the main unit part 125a, and a protection circuit 130 provided in a space formed between the leg parts 125b to make the auxiliary switch 120 perform opening operation under a prescribed condition. A case 131 of the protection circuit 130 is guided by the leg part 125b, to be positioned, and the case 131 is provided with a flange 132 fixable to be starter with the leg part 125b of the mounting bracket 125.

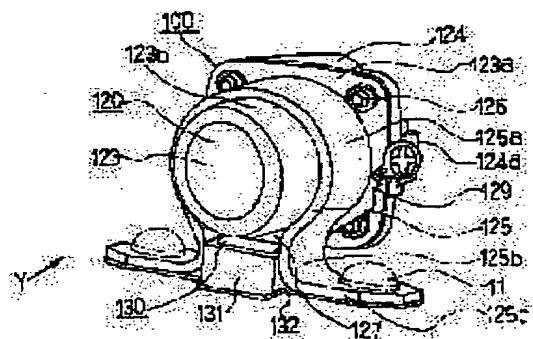

LEGAL STATUS

[Date of request for examination]

08.02.2001

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's decision of rejection]

[Date of requesting appeal against examiner's]

Searching PAJ

decision of rejection]

[Date of extinction of right]

Copyright (C); 1998,2003 Japan Patent Office